




Upcomming MikroTik Products

Announcements for 2017



Stay tuned

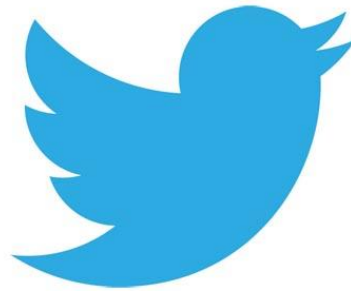

- Receive latest news on new products
- Follow us on twitter:
- https://twitter.com/fmsweb_de

cAP lite

- If you haven't, open your bag
- Small and light 2GHz AP
- Case can be changed
- Print your own cases
- Perfect for hotel, public areas and extending networks in your house







CSS326-24G-2S+RM

Multiport SwOS switch

DynaDish 6 and SXT 6

- Great for use in less used 6GHz spectrum
- Same familiar designs





CRS317-1G-16S+


high performance SFP+ switch

CRS317-1G-16S+

- 16 SFP+ ports
- Next generation switching chip
- Wire speed for all 10GbE ports
- Hardware-based Spanning Tree Protocol
- Dual boot SwOS or RouterOS

wAP LTE kit

- Wireless AP for LTE
- EU version supports LTE bands 1,2,3,7,8,20,38,40
- 2G, 3G, LTE supported
- Optional external antennas
- Comes with a stand mount

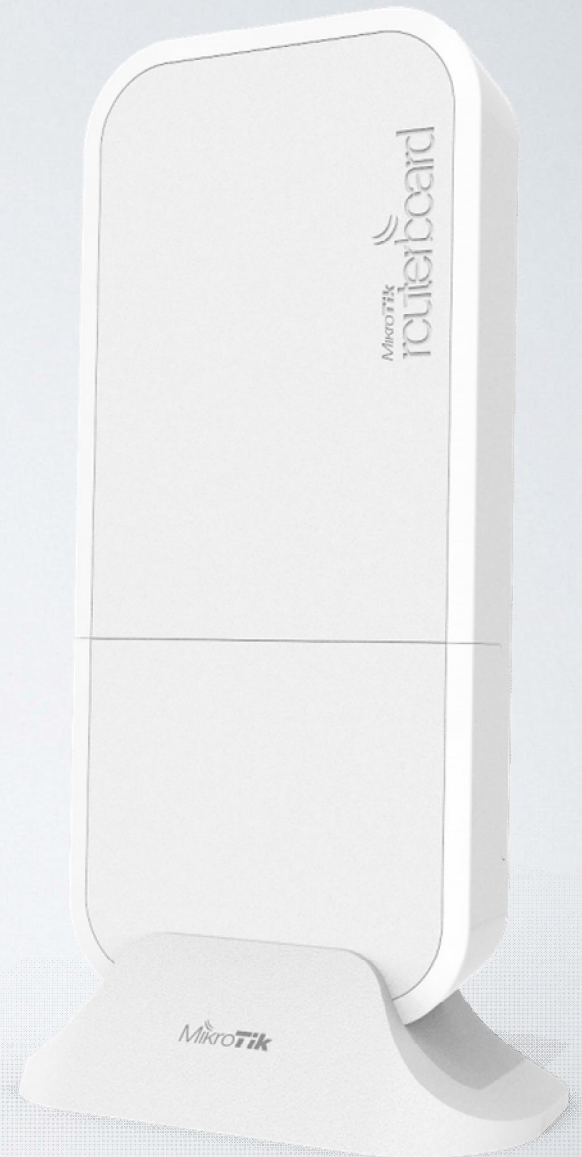



hAP mini

- Tiny 2GHz AP with three ports
- Upright design in new colours
- Only 8cm tall
- Two LAN ports, one WAN
- Configure differently if needed



8cm

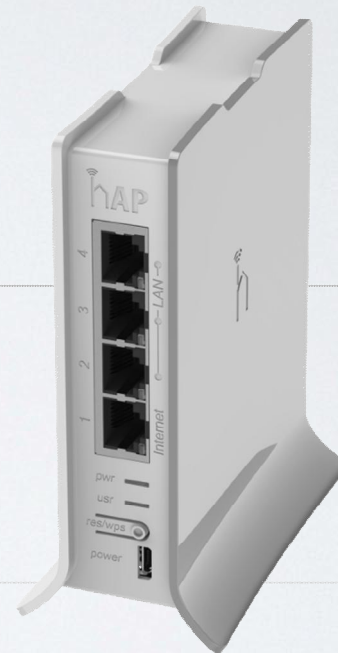

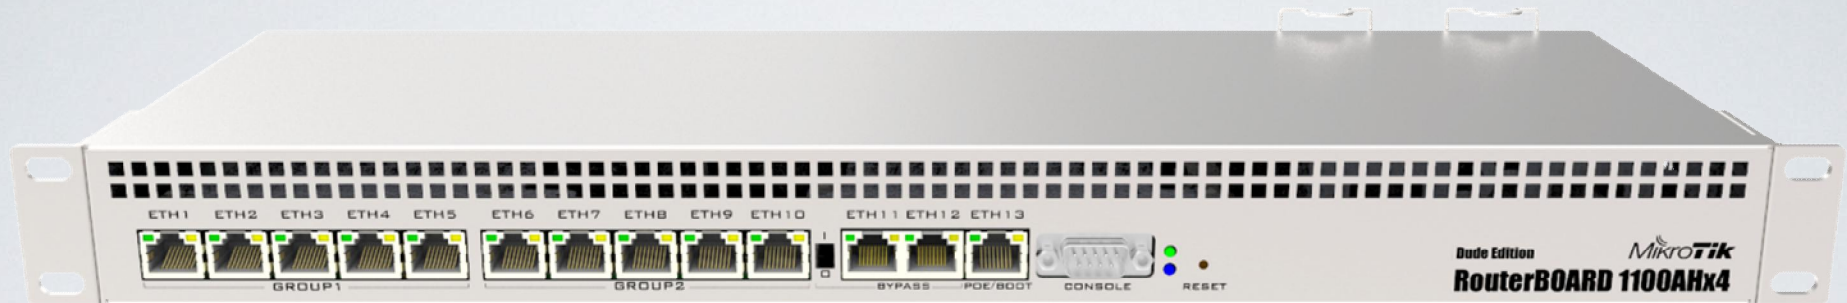


RB 1100AHx4

The timeless classic upgraded
with a new quad core CPU and more

Annapurna Alpine AL21400 CPU with four Cortex A15 cores clocked at 1.4 GHz

- Two SATA3 ports
- Two M.2 ports
- 60GB SSD included
- Accelerated IPsec
- -48V DC telecom power
- Dual PSU

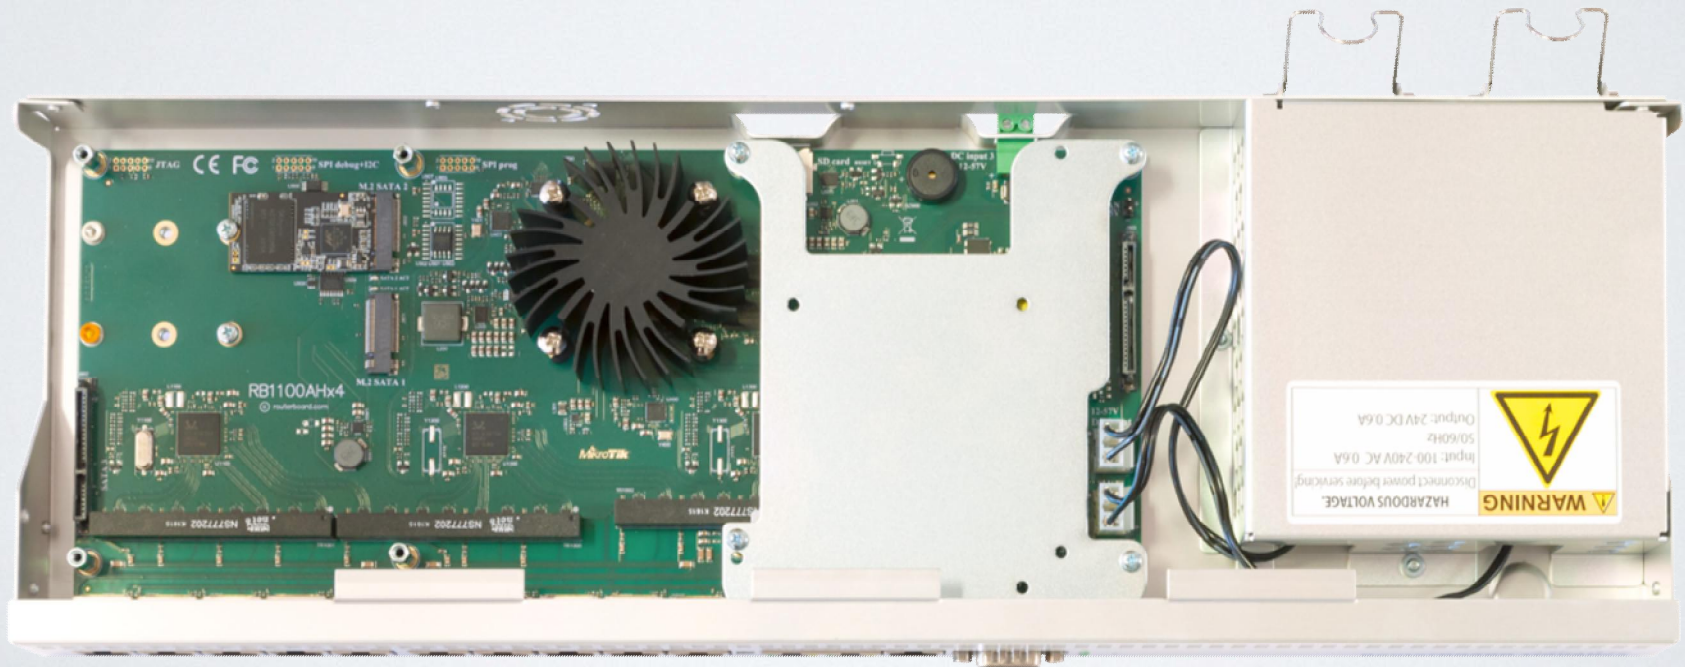



- 5.5 million PPS
- 7.5Gbps
- IPsec up to 2.2Gbps with AES128
- Overclock up to 2GHz

Two editions

- **RBI I00AHx4**
- **RBI I00AHx4 Dude edition**
includes 2x M2 and 2x SATA3 ports


PowerBox Pro

- Gigabit ethernet ports
- PoE output for your CPEs
- Same as hEX PoE
- Supports 802.3af/at
- SFP for fiber to tower
- Improved design



mUPS

- Just like a smart PoE injector
- Battery connector for 12V batteries (external)
- Battery kicks in when power is lost
- Step up converter keeps device going even if Voltage differs
- Can charge and monitor

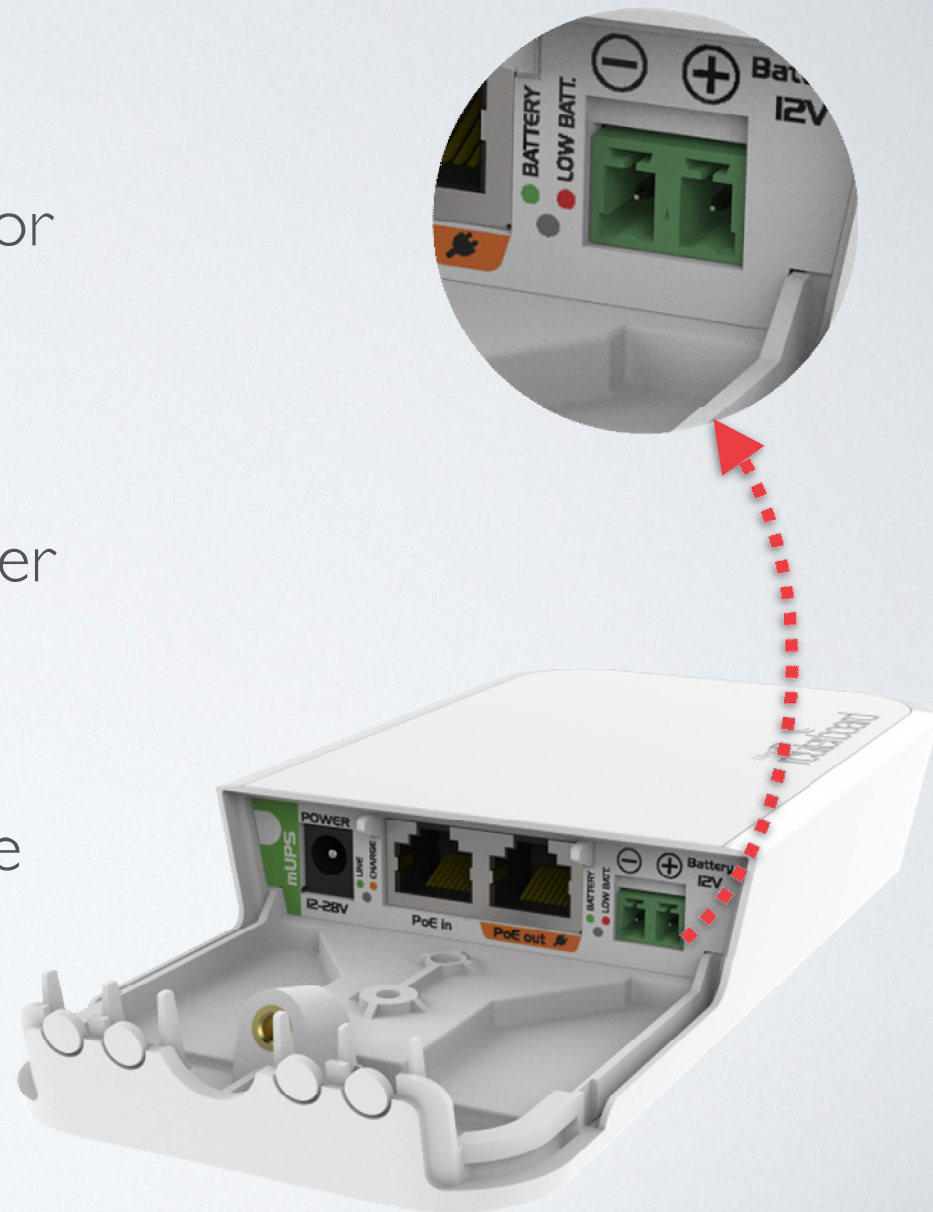

LtAP mini

- 2GHz AP in a rugged case
- miniPCle for LTE
- Built in GPS
- Serial port for other devices
- Perfect for cars or outdoor mobile applications





LtAP

- 2x miniPCle
- Built in 2.4GHz AP
- MMIPS Mediatek CPU 880MHz
- 2x MMCX connectors
- Built in GPS





wsAP ac lite

- Mount into standard EU or US electrical sockets
- Dual band ac
- Phone jack passthrough
- Two LAN ports
- USB for charging phones








wAP 60G

- 1 Gbit full duplex (wire speed)
- “Wireless wire” kit preconfigured
- Works in 60GHz spectrum
- Quad-core ARM CPU
- Targeted for up to 100m distances
- Q2/Q3

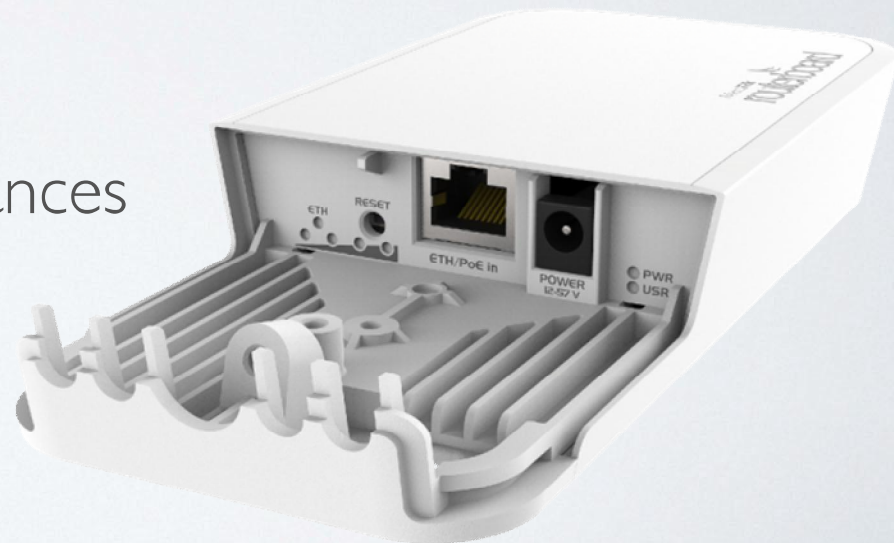


LHG 60G

- 1 Gbit full duplex (wire speed)
- Works in 60GHz spectrum
- Familiar LHG design
- Quad-core ARM CPU
- Low cost and low weight
- Longer distance than 100m
- Q2/Q3



CRS112-8P-4S

- PoE out 802.3af/at
- Eight gigabit ports
- Separate PSU for passive or 802.3af/at PoE out
- Low voltage PSU included
- Per port auto detection of PoE standard
- Four SFP ports

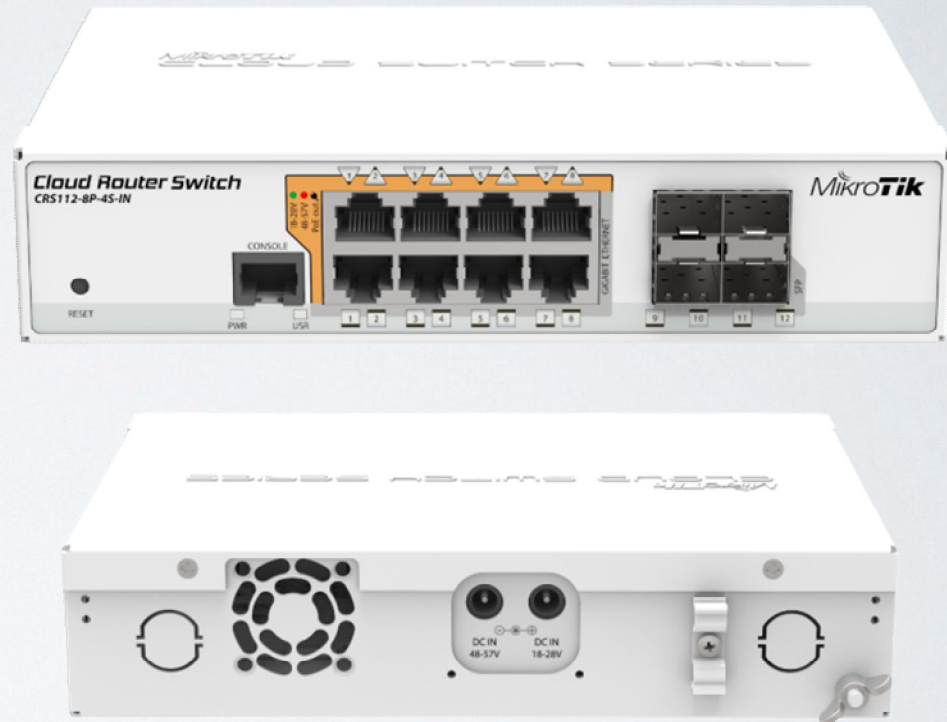



CRS328-24P-4S+RM

PoE out switch

CRS328-24P-4S+RM

- Dual boot SwOS or RouterOS
- 24 ports with PoE out function
- Supports 802.3af/at output
- Per port auto detection of PoE standard
- Four SFP+ ports for 10GbE
- One 120/220V IEC connector


Woobm

- Wireless out of band management (Woobm)
- Plug into a device to have a new management AP
- Can work as client to use in CCR rackmounts




M11

- Four core 880MHz CPU
- 1 miniPCle slot
- 1 Gigabit ethernet

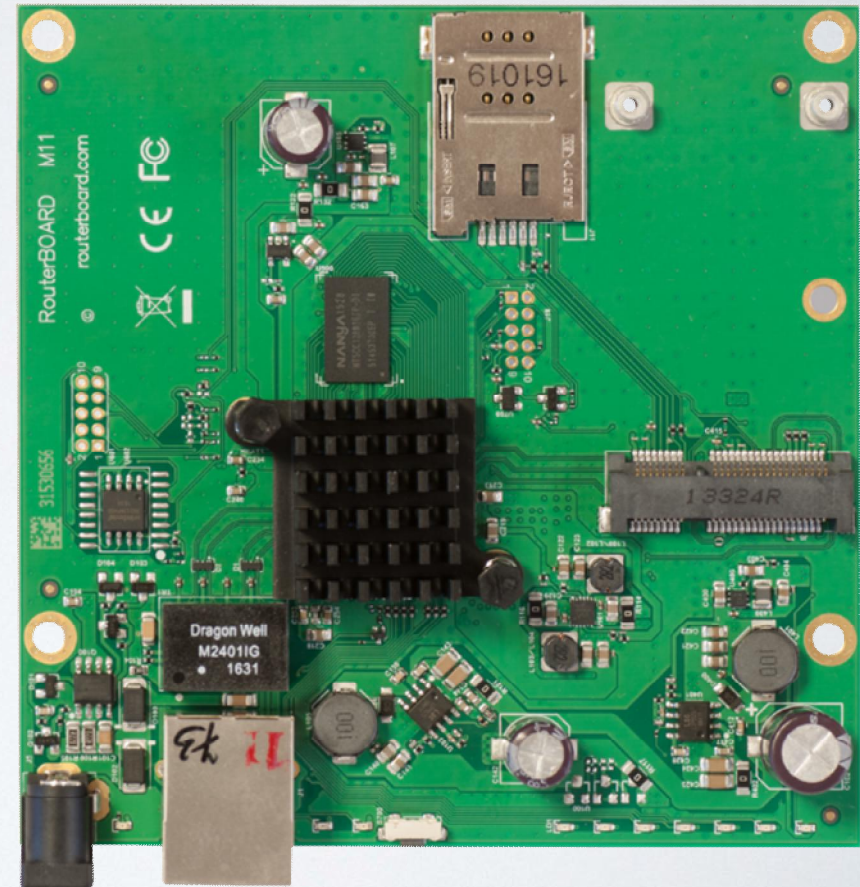

M33

- Four core 880MHz CPU
- 3 Gigabit ethernet
- 2 miniPCle slots
- 1 M.2 slot
- USB 3.0 and Serial port

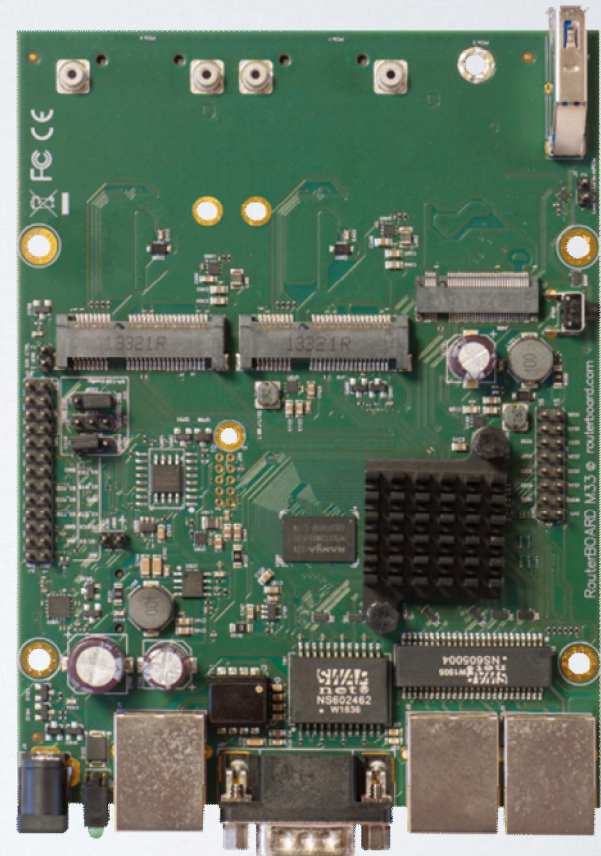



Contact Us



+49 761 2926500



sales@fmsweb.de



<http://shop.fmsweb.de>



https://twitter.com/fmsweb_de



THANK YOU